



10G SFP+ Active Optical Cable Series

GL10-AY1M3xxMxxM

10Gbps SFP+ Active Optical Cable

Features

- Hot-pluggable SFP+ cable ends
- Support 10.3125Gbps bit rate
- Available in lengths up to 300m
- Power Dissipation <1W
- Single +3.3V power supply
- Operating Case temperature range
0°C to 70°C
- RoHS-6 compliant
- Compliant with SFF-8431
- Compliant with SFF-8432

Applications

- 10G Ethernet
- Data Center

Ordering information

Part No.	Reach	Data Rate	Temp.
GL10-AY1M303M	3m	10.3125Gpbs	0°C to 70°C
GL10-AY1M305M	5m	10.3125Gpbs	0°C to 70°C
GL10-AY1M307M	7m	10.3125Gpbs	0°C to 70°C
GL10-AY1M310M	10m	10.3125Gpbs	0°C to 70°C
GL10-AY1M315M	15m	10.3125Gpbs	0°C to 70°C
GL10-AY1M320M	20m	10.3125Gpbs	0°C to 70°C
GL10-AY1M3100M	100m	10.3125Gpbs	0°C to 70°C

More detail product selection and cable lengths, please contact FIBRECROSS

Description

GL10-AY1M3xxM SFP+ active optical cables are designed for use in 10G-Ethernet links. The are compliant with SFF-8431, and the mechanical SFP+ plug is compatible with SFF-8432.



10G SFP+ Active Optical Cable Series

Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Power Supply Voltage	V _{CC}	0		3.6	V	
Storage Temperature	T _s	-40		+85	°C	
Relative Humidity	RH	5		85	%	Non-condensing
Operating Case Temperature	T _c	0		+70	°C	



Electrical Characteristics

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Power Supply Voltage	V _{CC}	3.135	3.3	3.465	V	
Power Dissipation	P _D			1	W	
Power Supply Current	I _{CC}			310	mA	
Data Rate			10.3125		Gbps	
Clock Rate-I2C				400	kHz	
Transmitter						
Input Differential impedance	Z _{IN}		100		ohm	
Differential data input swing	V _{IN}	180		700	mV	
Transmit Disable Voltage	V _{DIS}	2		V _{CC} +0.3	V	
Transmit Enable Voltage	V _{EN}	0		0.8	V	
Transmit Fault Assert Voltage		2		V _{CC} +0.3	V	
Transmit Fault De-Assert Voltage		0		0.8	V	
Receiver						
Output Differential impedance	Z _{out}		100		ohm	
Differential data Output Swing	V _{out}	300		850	mV	
Rx_LOS Output Voltage-High		2		V _{CC} +0.3	V	
Rx_LOS Output Voltage-Low		0		0.8	V	

General Specifications

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Bit Rate	BR		10.3125		Gbps	
Bit Error Ratio	BER			1E-12		PRBS31
Maximum Supported Distances						
Fiber Type	Bandwidth (850nm)					
50um	2000MHz*km			300	m	OM3
50um	4700MHz*km			400	m	OM4

Pin Assignment:

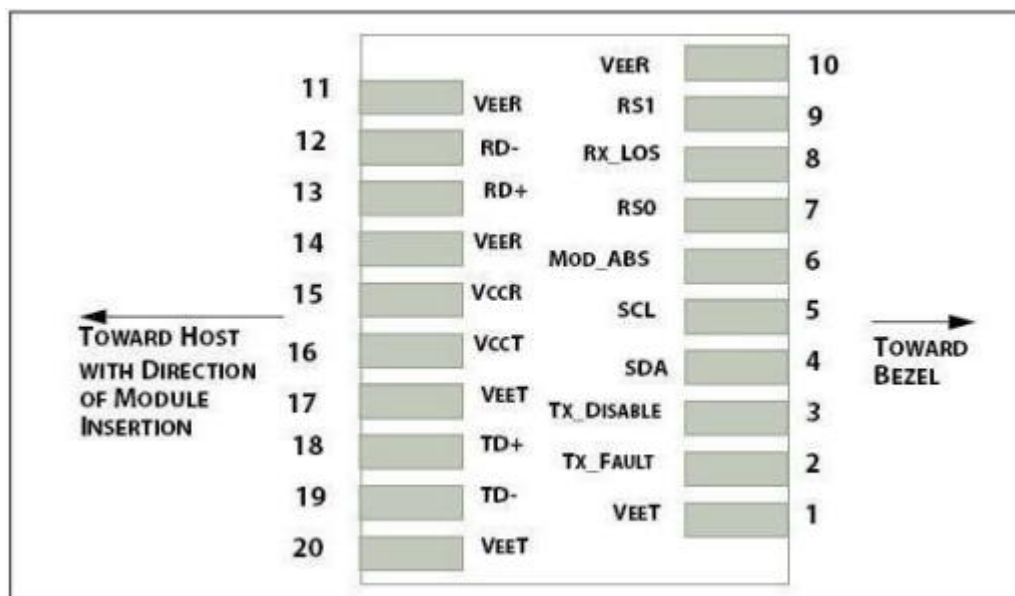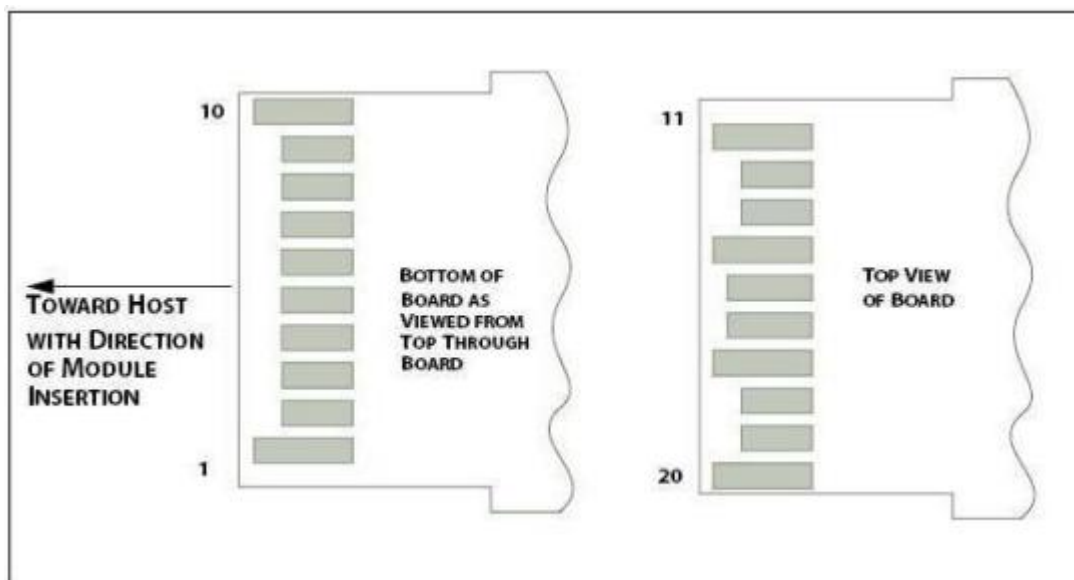

Pin Descriptions

PIN	Symbol	Name / Description	Note
1	VEET	Transmitter Ground (Common with Receiver Ground)	1
2	TX_Fault	Transmitter Fault	2
3	TX_Dis	Transmitter Disable	3
4	SDA	2-Wire Serial Interface Data Line	4
5	SCL	2-Wire Serial Interface Clock	4
6	MOD_ABS	Module Definition, Grounded in the module	---



10G SFP+ Active Optical Cable Series

7	RS0	Receiver Rate Select (not used)	---
8	RX_LOS	Receiver Loss of Signal Indication	5
9	RS1	Transmitter Rate Select (not used)	---
10	V _{EER}	Receiver Ground (Common with Transmitter Ground)	1
11	V _{EER}	Receiver Ground (Common with Transmitter Ground)	1
12	RD-	Receiver Inverted Data Output	6
13	RD+	Receiver Data Output	6
14	V _{EER}	Receiver Ground (Common with Transmitter Ground)	1
15	V _{CCR}	Receiver Power	7
16	V _{CCT}	Transmitter Power	7
17	V _{EET}	Transmitter Ground (Common with Receiver Ground)	1
18	TD+	Transmitter Non-Inverted Data Input	6
19	TD-	Transmitter Inverted Data Input	6
20	V _{EET}	Transmitter Ground (Common with Receiver Ground)	1

Note1: Module ground pins GND are isolated from the module case.

Note2: The Tx_Fault output is an open collector/drain output, which should be pulled up with a 4.7k to 10k ohms resistor on the host board.

Note3: Transmitter output disabled on TDIS >2.0V or open, enabled on TDIS <0.8V.

Note4: Shall be pulled up with 4.7K-10Kohms to a voltage between 3.15V and 3.45V on the host board.

Note5: LOS is open collector output. Should be pulled up with 4.7 – 10k ohms on host board to a voltage between 2.0V and 3.6V. Logic 0 indicates normal operation; logic 1 indicates loss of signal.

Note6: VccR and VccT are the receiver and transmitter power supplies. They are defined as 3.3V \pm 5% at the SFP+ connector pin.


Note7: They are AC-coupled, differential lines with 100 Ω differential termination inside the module.



10G SFP+ Active Optical Cable Series

Mechanical Dimensions

Unit: mm

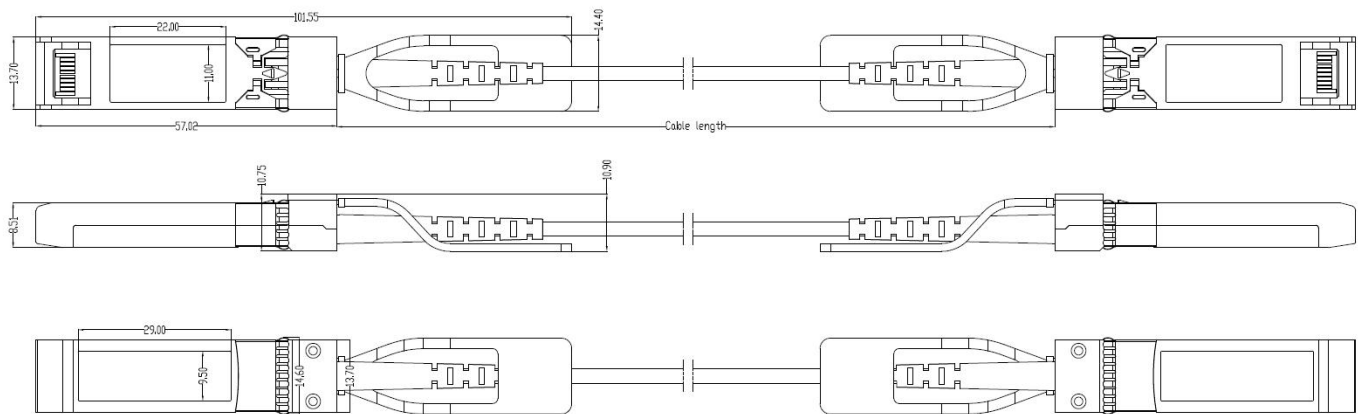

Revision History

Revision	Initiated	Reviewed	Approved	DCN	Release Date
V1.0	LIN	XX	XX	Released.	July 16, 2022

Important Notice

Performance figures, data and any illustrative material provided in this data sheet are typical and must be specifically confirmed in writing by FIBRECROSS before they become applicable to any particular order or contract. In accordance with the FIBRECROSS policy of continuous improvement specifications may change without notice. The publication of information in this data sheet does not imply freedom from patent or other protective rights of FIBRECROSS or others. Further details are available from any FIBRECROSS sales representative.